

Legend

	Airbag		Airbag inflator/ stored gas inflator		Seat belt pre- tensioner		SRS control unit
	Gas strut, preloaded spring		High strength zone		Zone requiring special attention		Battery, low-voltage
	High voltage power cable		Battery pack, high- voltage		Fuel tank content gasoline / ethanol		Low voltage device that disconnects high voltage
	High voltage compo- nent						

This overview shows the maximum range of equipment of the vehicle.



ID No.	Version No.	Page No.
LGW-HAVAL-JOLION PRO HEV-1	V1	1/4



1. Identification / recognition



LACK OF ENGINE NOISE DOES NOT MEAN VEHICLE IS OFF. SILENT MOVEMENT OR INSTANT RESTART CAPABILITY EXISTS UNTIL VEHICLE IS FULLY SHUT DOWN. WEAR APPROPRIATE PPE.





2. Immobilisation / stabilisation / lifting

Immobilize vehicle

1. Press the P button to engage the parking gear (P).
2. Pull up the EPB switch, ensure the vehicle is stationary.
3. Shut power off.


Stabilisation-lifting points

Lifting points

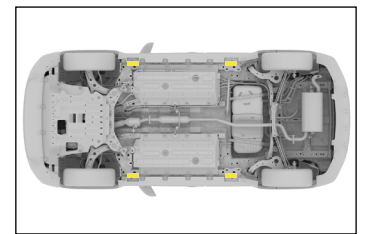


3. Disable direct hazards / safety regulations


Turn off the vehicle and keep the smart key away from the vehicle

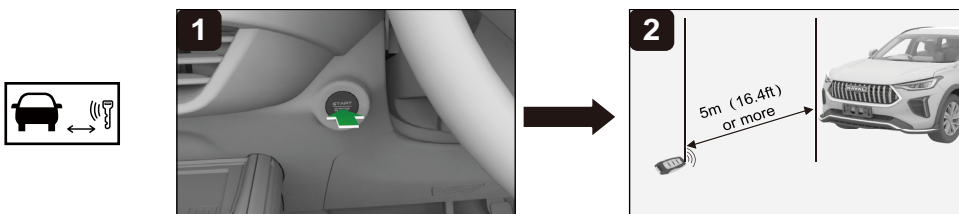


Disconnecting negative electrode of 12V battery

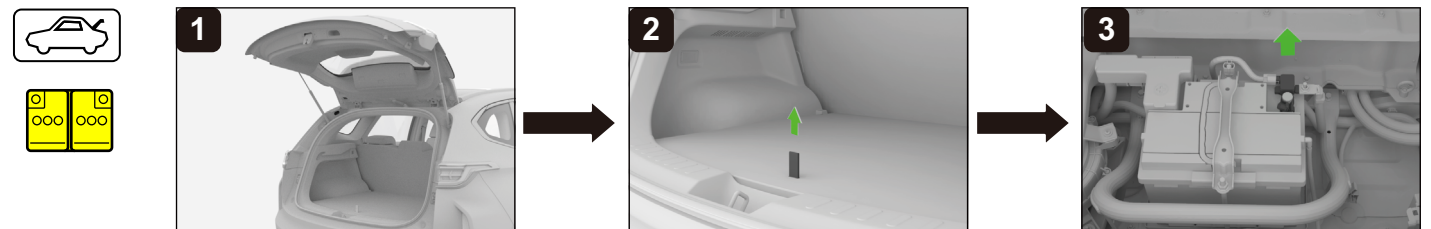


Disconnecting battery safety switch

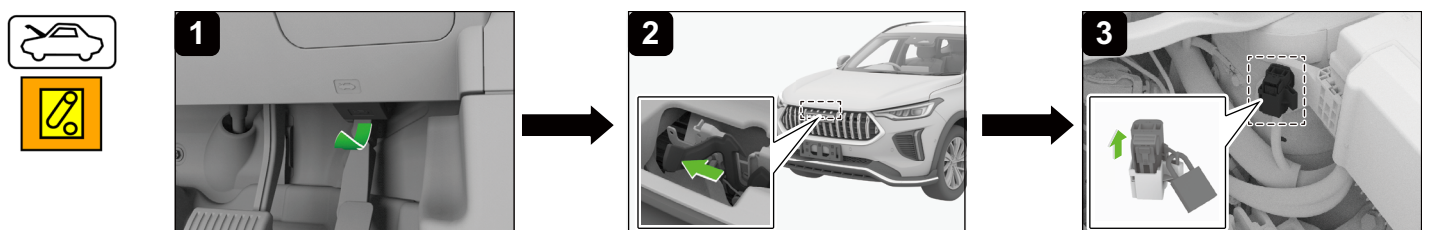


HAVAL	HAVAL JOLION PRO HEV		
	SUV From 2024		

Disconnecting battery safety switch

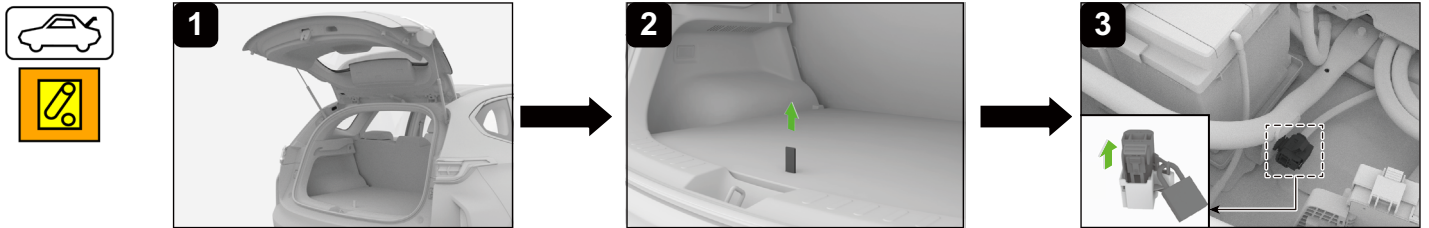

4. Access to the occupants

High strength steel in body




Mechanical seat adjustment



Electrical seat adjustment




Steering column adjustment

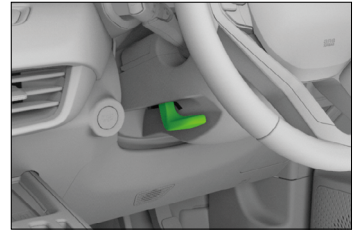






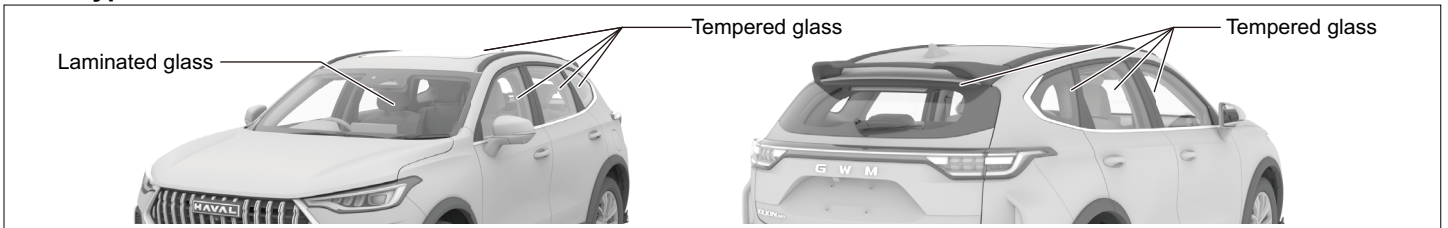


WHEN THE 12 V BATTERY IS DISCONNECTED, ELECTRICAL COMPONENTS CANNOT BE OPERATED.


Glass types




5. Stored energy / liquids / gases / solids

		12 V			55 L
		335.8 V			550 g

6. In case of fire

	USE LARGE AMOUNTS OF WATER	If it is difficult to apply copious amounts of water to the high voltage battery, it is recommended to allow the high voltage battery to burn itself out.
--	-----------------------------------	---



BATTERY RE-IGNITION !



DO NOT SUBMERGE VEHICLE TO EXTINGUISH BATTERY.

7. In case of submersion

Proper personal protective equipment should be worn when handling any flooded vehicle. Pull the vehicle out of water as much as possible, immobilize the vehicle and disable the vehicle before starting any operation (refer to chapter 3).


This overview shows the maximum range of equipment of the vehicle.	ID No.	Version No.	Page No.
	LGW-HAVAL-JOLION PRO HEV-1	V1	3/4

HAVAL	HAVAL JOLION PRO HEV		
	SUV From 2024		



Tilt the vehicle to one side to allow water to drain out of the vehicle.

8. Towing / transportation / storage

Location front hook



Location rear hook

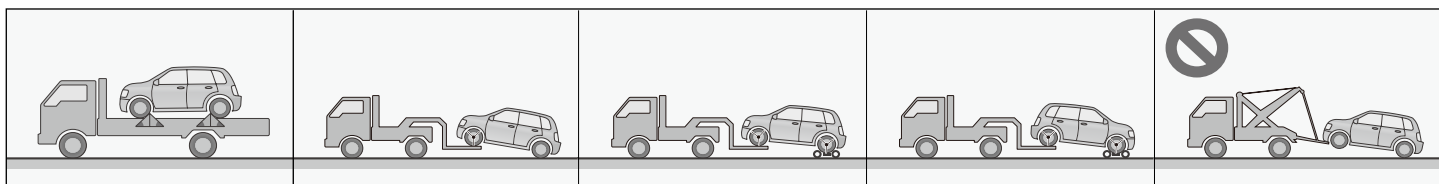

STORE AT SAFE DISTANCE FROM OTHER VEHICLES!








BATTERY RE-IGNITION !






9. Important additional information








Driver's seat has a far side airbag in addition to the side airbag. Location of far side airbag is shown in the mark **9.** on page 1.

10. Explanation of pictograms used

Pictogram	Designation
	Low voltage device that disconnect high voltage
	Remove smart key
	Bonnet
	Use thermal Infrared camera
	Hybrid Electric Vehicle on fuel of liquid group 2

Pictogram	Designation
	Flammable
	Explosive
	Corrosives
	Warning, Electricity
	Air-conditioning component

Pictogram	Designation
	Hazardous to the human health
	Use water to extinguish the fire
	Boot
	General warning sign
	Acute toxicity

This overview shows the maximum range of equipment of the vehicle.

ID No.

Version No.

Page No.

LGW-HAVAL-JOLION PRO HEV-1

V1

4/4